

07-17-00

A +

PTO/SB/05 (2/98) (modified)  
 Approved for use through 9/30/2000, OMB 0651-0032  
 Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

<b>NEW UTILITY PATENT APPLICATION TRANSMITTAL</b> <i>(only for new nonprovisional applications under 37 CFR 1.53(b))</i>	Attorney Docket Number	21113-04968
	First Named Inventor	Marc S. Casalaina
	Total Pages in this Submission	32
	Express Mail Label No.	EL541495004US

542 U.S. PTO  
09/615383

07/13/00


APPLICATION ELEMENTS	ACCOMPANYING APPLICATION PARTS
1. <input checked="" type="checkbox"/> Fee Transmittal Form (in duplicate) <input type="checkbox"/> Check Enclosed 2. <input checked="" type="checkbox"/> Specification <i>(preferred arrangement set forth below)</i> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> Descriptive Title of the Invention</li> <li><input checked="" type="checkbox"/> Cross Reference(s) to Related Case(s)</li> <li><input checked="" type="checkbox"/> Statement Regarding Fed sponsored R &amp; D</li> <li><input checked="" type="checkbox"/> Background of the Invention</li> <li><input checked="" type="checkbox"/> Brief Summary of the Invention</li> <li><input checked="" type="checkbox"/> Brief Description of the Drawing(s)</li> <li><input checked="" type="checkbox"/> Detailed Description</li> <li><input checked="" type="checkbox"/> Claim or Claims</li> <li><input checked="" type="checkbox"/> Abstract of the Disclosure</li> </ul> 3. <input checked="" type="checkbox"/> Drawing(s) <i>(when necessary per 35 USC 113)</i> 4. Oath or Declaration <ul style="list-style-type: none"> <li>a. <input checked="" type="checkbox"/> New Declaration (Unsigned)  <input type="checkbox"/> Executed</li> <li>b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d))  <i>(for continuation/divisional with Box 17 completed)</i> <ul style="list-style-type: none"> <li>i. <input type="checkbox"/> DELETION OF INVENTOR(S)                Signed statement attached deleting inventor(s)                named in the prior application, see 37 CFR                1.63(d)(2) and 1.33(b).</li> </ul> </li> </ul> 5. <input type="checkbox"/> Incorporation by Reference <i>(useable if Box 4b is checked)</i> . The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.	6. <input type="checkbox"/> Assignment & Assignment Recordation Cover Sheet 7. <input type="checkbox"/> Certified Copy of Priority Document(s) <i>(if foreign priority is claimed)</i> 8. <input type="checkbox"/> Information Disclosure Statement & PTO-1449 <input type="checkbox"/> Copies of IDS Citation(s) 9. <input type="checkbox"/> Preliminary Amendment 10. Small Entity Statement <input type="checkbox"/> New Statement enclosed <input type="checkbox"/> Statement filed in prior application. Status still proper and desired 11. <input checked="" type="checkbox"/> Return Postcard 12. <input type="checkbox"/> 13. <input type="checkbox"/> 14. <input type="checkbox"/> 15. <input type="checkbox"/> 16. <input type="checkbox"/>
<b>ADDRESS TO:</b> <b>Box Patent Application</b> <b>Commissioner for Patents</b> <b>Washington, D.C. 20231</b>	

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_/\_\_\_\_

Prior application information: Examiner: \_\_\_\_\_ Group/Art Unit: \_\_\_\_\_

#### 18. CORRESPONDENCE ADDRESS

NAME	Neil F. Maloney Fenwick & West LLP				
ADDRESS	Two Palo Alto Square				
CITY	Palo Alto	STATE	CA	ZIP CODE	94306
COUNTRY	U.S.A.	TELEPHONE	(415) 875-2477	FAX	(415) 281-1350
Name (Print/Type)	Neil F. Maloney		Registration No. (Attorney/Agent)	42,833	
Signature				Date	July 13, 2000

21113/04968/SF/5026810.1

# **PATENT**

## **Delta Caching**

**Inventor:**  
**Marc S. Casalaina**

Prepared by:  
Fenwick & West LLP  
Two Palo Alto Square  
Palo Alto, CA 94306  
(650) 494-0600

# Delta Caching

Inventor: Marc S. Casalaina

## BACKGROUND OF THE INVENTION

### FIELD OF THE INVENTION

This invention relates to the exchanging of information over a network such as the Internet and more specifically, to the caching of select document information on the client side of a client-server system thereby improving the efficiency and response time of the system.

### DESCRIPTION OF THE RELATED ART

There are numerous applications where a client side user interface (UI) obtains a document from a server over a network. One such application involves a product configuration that is performed over the Internet using a method whereby a client browser obtains a document from a server. This document may, for example, be a web page that contains selectable features of a product. A user can make changes to the document on the client browser by selecting various product features and providing other configuration information. The altered document resulting from this interaction is then submitted to the server where the information provided by the user is processed. Such processing can, for example, produce configuration results that are responsive to the user provided information. After the server has finished processing the provided information, it sends the client a new document that embodies the configuration results. This

exchange of documents between the server and client browser can be repeated until the product configuration is complete.

There are various latency problems associated with this type of on-line configuration process. For example, the user experiences the latency involved in server processing. Such processing typically involves accessing a configuration engine that determines any incompatibilities or constraints arising from the selection of certain product features by the user. Additionally, the user experiences the latency associated with the time expended while the document is in transit between the server and the client browser (e.g., network latency). Depending on factors such as the complexity of the product being configured and the number of other users attempting to access the server or configuration engine, the latency attributed to server processing time and transit time can be significant.

One solution offered to alleviate latency associated with server processing time is to cache the configuration results of the most often-selected configuration states on the server side. The document embodying the configuration results of the most often-selected configuration states can also be cached on the server side. Thus, if the user submits a document that reflects a configuration state that is associated with configuration results or a document that the server has stored, then the server does not need to process the user provided document (e.g., the configuration engine does not need to be accessed to generate the configuration results). Rather, the server can send out the stored configuration results or document that reflects those configuration results. However, this solution still suffers from latency resulting from the transit of information

from the server to the client browser, whether that information is a document or configuration results.

Another solution offered to alleviate latency involves transferring server side tools (e.g., a configuration engine) to the client side, thereby reducing latency associated with server processing. This solution, however, introduces considerable latency involved in transferring such tools to the client, not to mention that it is infeasible to perform complex configurations using client-side tools. Moreover, what was once a server side latency problem is now a client side latency problem. Additionally, tools such as configuration engines involve a great deal of calculation, and are therefore best implemented on a high performance machine. As such, a user having a lower-end machine may experience excessive delays using such a client side engine.

What is needed, therefore, is a technique that provides a solution to latency associated with server side processing time (e.g., configuration engine processing time), as well as to latency resulting from the transit of information or tools from the server side to the client side.

## BRIEF SUMMARY OF THE INVENTION

Techniques described here provide a solution to latency associated with server side processing time, as well as to latency resulting from the transit of information or tools from a server side to a client side. The server side and client side can be coupled, for example, via a hard link or a network-type connection such as the Internet or a local area network. Although the following description provides examples in the context of product configuration over the Internet, these techniques can be employed in any client-

server environment where it is desirable to decrease latency associated with server processing time and or the transit of information from the server side to the client side.

In the context of a product configuration over the Internet, select and preprocessed configuration results are stored on the client side machine instead of on the server-side machine. In one embodiment, these preprocessed configuration results are represented by graphical and textual delta page information that defines the difference between a current page and a next page based on a particular user input. This delta page information is embedded in the current page (e.g., the page that is initially presented to the client side browser). As such, the client side browser does not have to contact the server side when the particular user input that is associated with preprocessed configuration results (e.g., delta page information) is provided. Rather, the client side browser can use the delta page information embedded or cached within the current page to update that page thereby yielding the requested next page. Thus, latency from server side processing and network transit time is reduced. An algorithm can be used to implement a client side caching and updating mechanism. Such an algorithm can be implemented on a client side machine without requiring the high-end performance expected of a server-side machine. As such, even clients with low-end machines will experience very little delay when using the described technique.

The features and advantages described in the specification are not all inclusive and, in particular, many additional features and advantages will be apparent to one of ordinary skill in the art in view of the drawings, specification, and claims. Moreover, it should be noted that the language used in the specification has been principally selected

for readability and instructional purposes, and not to limit the scope of the inventive subject matter.

## BRIEF DESCRIPTION OF THE DRAWINGS

5        Figure 1 is a block diagram of a system for communicating page information over a network where delta page information is associated with a requested page in accordance with one embodiment of the present invention.

10        Figure 2 is a flow diagram illustrating a method for transmitting page information generated on a server side to a client side in accordance with one embodiment of the present invention.

      Figure 3a is a flow diagram illustrating a method for updating client side page information in accordance with one embodiment of the present invention.

      Figure 3b is a flow diagram illustrating a method for receiving page information on a client side in accordance with one embodiment of the present invention.

15        Figure 4 is a pictorial representation of delta page information stored in a memory in accordance with one embodiment of the present invention.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

20        Figure 1 is a block diagram of a system for communicating page information over a network where delta page information is associated with a requested page in accordance with one embodiment of the present invention. The system includes a client side 101 and a server side 131 coupled together by a network 130. Network 130 can be a local area network (e.g., intra-office network) or a wide area network (e.g., inter-office network or

the Internet). Alternatively, network 130 can be a hard link, or any other type of communication path that allows one computer to communicate with another computer (e.g., a wireless communication link).

Client side 101 comprises a computer 105 and an interface 110 that is operatively  
5 coupled to computer 105. A page 115 is presented to a user via interface 110. Associated with page 115 is delta page information 120. Server side 131 comprises a computer 135 and a page generation unit 140. Server side 131 may also include various other tools. For instance, in the context of a product configuration that is performed over the Internet, server side 131 might also include a configuration engine coupled to (or  
10 included in) computer 135. In one example embodiment, server side 131 can be representative of an Internet-based service provider, such as a virtual computer store that allows a user to configure and purchase a customized computer system on-line. In such an embodiment, client side 101 might be representative of a user's home or office computer system that is interacting with server side 131 via an Internet connection. In  
15 another example embodiment, server side 131 might be representative of an application server, and client side 101 might be representative of a workstation or other personal computing environment.

Computer 105 can be representative of any one of a number of computing environments. For example, computer 105 might be a home personal computer, an office  
20 workstation, a laptop, or an embedded microcontroller coupled to a use interface. Likewise, computer 105 might be a personal digital assistant or a cell phone that is capable of receiving communications and displaying them to a user so that the user can

respond accordingly. In general, computer 105 can be any processing environment that allows for user interaction based on received communications.

Interface 110 allows a user to interact with the system and can be, for example, a browser or graphical user interface (GUI) that is displayed to a user via a display such as a monitor, flat panel display or LED display. Alternatively, interface 110 might be a mechanism that translates incoming communications into, for example, sounds or a Braille communication so that a visually impaired user could understand and respond to the communication. Page 115 can be presented to the user by interface 110. Page 115 can include visual communication such as controls (e.g., edit or list boxes), configurable product information, and text. Alternatively, page 115 can include non-visual communication (e.g., an audible or Braille communication). In general, page 115 can include any type of information (e.g., textual, graphical, physical, or audible) that informs the user. The user can then provide input to the system based on page 115.

Delta page information 120 represents the differences between page 115 and various pages that can be displayed to the user next based on user input. For example, assume for discussion purposes that page 115 provides the user with a pull-down or list box that allows the user to choose one of three possible choices: A, B or C. In the context of a non-visual communication, page 115 might provide the user with a Braille message allowing for similar choices. Upon providing a user input (e.g., choosing A and submitting that choice), the user is then presented with a new page that reflects that choice. In some cases, changes in page 115 triggered by a particular user input only affect a portion of page 115. However, such a user input may affect all of page 115 (e.g., user input requires a completely new page). Regardless, the changes triggered by user

input represent the difference between page 115 and the page that reflects page 115 plus the user input (also referred to as the next page). Such changes comprise delta page information 120.

For example, if choice A is selected and submitted, page 115 will be updated to reflect that choice. The changes to the page resulting from that update represent the difference between page 115 and the page that reflects page 115 plus choice A. Likewise, if the user chooses and submits choice B, the resulting changes represent the difference between page 115 and the page that reflects page 115 plus choice B, and if the user chooses choice C, the resulting changes represent the difference between page 115 and the page that reflects page 115 plus choice C. One skilled in the art will recognize that the differences between page 115 and the next page can also be the result of any number of choices made by the user (e.g., 20 choices made on 20 different pull-down or list boxes) on page 115.

In one embodiment, delta page information 120 is included in a table that is embedded in page 115. The table is transmitted along with page 115 from server side 131 to client side 101, and is hidden from the user. The table contains the delta page information, relevant to page 115, resulting from certain user inputs (e.g., the five most commonly selected user inputs). Each such user input corresponds to a change or set of changes to page 115. Each change or set of changes is stored in the table and can be indexed by the user input that triggered those particular changes. As such, once a user input is provided, it can be compared to the user inputs listed in the table. If a match is found, then the changes associated with that input can be retrieved from the table and used to update page 115 thereby producing a new page that is responsive to the provided

user input. As such, server side 131 does not need to be contacted, nor does server side 131 need to generate and transmit the new page.

In another embodiment, delta page information 120 is externally coupled to page 115. For example, delta page information 120 can be a data file that is transmitted along with page 115. Responsive to receiving a user input, the data file can be parsed to determine if that user input is stored therein. If a match is found, then delta page information associated with that user input can be retrieved from the data file and used to update page 115 thereby producing a new page that is responsive to the provided user input. Other schemes can be implemented to ensure that selected delta page information is provided to client side 101 along with page 115. Regardless of the scheme used, the end result is the same: if a user input received on the client side is found in delta page information 120, then server side 131 does not need to be contacted, nor does server side 131 need to generate and transmit the new page.

Once it is determined that delta page information 120 includes changes to page 115 necessitated by user input, a process running on client side 101 can be used to update page 115 with those changes. In one embodiment, this process is transmitted to the client side independent of transmitted page information. Alternatively, this process is transmitted to the client side along with transmitted page information (e.g., embedded in page 115). Regardless of how or when client side receives this process, it is used for updating page 115. Such a process can be implemented, for example, in a web browser scripting language (e.g., JavaScript or VBScript) or other program language that allows interface 110 to update page 115 using Dynamic HTML with the related delta page information 120. Once such a process is transmitted and received, a flag can be set to

indicate that client side 101 has received the process. As such, the process need only be sent once from server side 131 during a particular on-line session.

On server side 131, computer 135 can be representative of any conventional processing environment. For example, computer 135 may be a server, a workstation or a microcontroller. Page generation unit 140 is used to generate page 115 in response to user input provided on client side 101. This page 115 may be an entire page (e.g., a web page or a UI page). Alternatively, this page 115 can be a portion of a page. As explained above, page 115 can be associated with delta page information 120 that reflects the difference between page 115 and a next page that is responsive to user input submitted from that page 115. However, not all pages 115 generated by page generation unit 140 need to be associated with delta page information 120. Moreover, each page 115 generated by page generation unit 140 can be associated with delta page information 120 that is unique to that particular page 115. On the other hand, two different pages 115 generated by page generation unit 140 can each be associated with the same delta page information 120. For example, if a first page reflects configuration state A and a second page also reflects configuration state A, then both those pages can be associated with the same delta page information 120. Whether delta page information 120 exists for a particular page 115, or is shared by various pages 115 is dependent upon, for example, the application and the user inputs provided.

Data that is used to determine what next pages (relevant to page 115) should be preprocessed can be collected, analyzed and stored on server side 131. The term “preprocessed page” is used to describe a next page that can be obtained by combining the current page 115 with some amount of delta page information 120 that is associated

with that current page 115. Factors such as how often a particular next page is selected from a page 115, as well as new advertising campaigns encouraging the use of a particular next page (relevant to page 115), can be used to determine what next pages should be preprocessed. Other factors and data points that are predictive of user behavior  
5 relevant to a particular page 115 can be used in determining what next pages should be preprocessed.

Once it is determined that a particular next page should be preprocessed, the information that defines the difference of that next page relevant to the preceding page can be stored on server side 131 (e.g., in a memory coupled to computer 135). Such  
10 stored difference information can exist for a number of page-pair combinations. For example, a first page-pair combination might be A-B, where the difference information between page A and page B is a pull-down list and some informational text; a second page-pair combination might be A-C, where the difference information between page A and page C is a banner ad or other advertisement; a third page-pair combination might be  
15 B-E, where the difference information between page B and page E is a Braille message; and a fourth page-pair combination might be C-E, where the difference information between page C and page E is an audible tone having a distinct pitch. The stored difference information can be organized to facilitate its access. For instance, each set of difference information can be indexed according to its associated user input.  
20 Alternatively, each set of difference information can be indexed according to its associated page-pair combination. Other indexing schemes can be used as well.

In one embodiment, page generation unit 140 accesses the stored difference information relevant to the page being generated and embeds that difference information

in the page (e.g., in a look-up table) so as to provide delta page information 120 with the generated page. In another embodiment, computer 135 accesses the stored difference information relevant to the page being generated by page generation unit 140, and that difference information is transmitted externally to the page (e.g., in a data file) thereby providing delta page information 120. Other methods for associating the relevant stored difference information with the corresponding page on server side 131 can be used to achieve the same functional result: delta page information 120 is transmitted along the generated page.

The embodiment shown in Figure 1 is offered to facilitate discussion and is not intended to limit the present invention. Those skilled in the art will recognize that numerous other system configurations can be employed in accordance with this disclosure. Additionally, the user that is interacting with the system may be a human or a machine capable of interacting with the system (e.g., another computer system). Furthermore, a user input may be representative of a single user input or a set or accumulation of user inputs (e.g., such as a configuration state of a configurable product).

Figure 2 is a flow diagram illustrating a method for transmitting page information generated on a server side to a client side in accordance with one embodiment of the present invention. The method includes, responsive to receiving a request for page information that is not available at the client side, generating 205 a page that reflects the requested information. For discussion purposes, assume that a user on the client side has selected various features of a configurable product and has submitted the selected features. Further, assume that the product features selected require page information that is not available on the client side. The server side will therefore receive a request for a

new page that reflects the user input provided (e.g., the selected product features). The server may engage a configuration engine to compute a new configuration state based on those selected product features. A page that reflects the new configuration state can then be generated.

5           The method further includes transmitting 210 the page along with any associated delta page information. This delta page information can, for example, be delta configuration information wherein such information defines the differences (e.g., graphical and textual) between the transmitted page and various next pages. Such next  
10           pages can be selected, for instance, based on the frequency of those next pages having been requested in the past. The delta configuration information can be indexed, for instance, according to the corresponding input that would trigger a need for such information. Transmitting this delta configuration information to the client side along with an initially requested configuration page reduces the need to access the server side configuration engine and eliminates the need to transmit new page data from the server  
15           side. Thus, latency associated with such server side actions is reduced.

Figure 3a is a flow diagram illustrating a method for updating client side page information in accordance with one embodiment of the present invention. The method includes, responsive to receiving user input that is associated with delta page information available at the client side, retrieving 305 that delta page information. For example, in  
20           the context of an on-line product configuration, commonly requested configuration states can be stored inside a client side web page that was transmitted from a server side in accordance with one embodiment of the present invention. Such a web page contains, for example, configuration data presented to the user in the form of controls (e.g., edit boxes

and list boxes). As such, commonly requested configuration states can be stored in terms of control deltas, which are bits of information that indicate the difference between a control in its present state and the same control in a new state based on received user input. Other delta-type page information can be stored as well (e.g., textual, graphical, physical, audible information). Such stored information is organized so that it can be timely retrieved. In one embodiment, for example, the information is stored and indexed in a look-up table. Once a user input is received, the table can be parsed to determine if that particular user input is stored in the table and therefore preprocessed. If so, the delta page information (e.g., control deltas) corresponding to that input can be retrieved from the table.

Once it is determined that the user input provided corresponds to stored delta page information and that information is retrieved, the method continues with updating the page based on the delta page information. Continuing with the on-line product configuration example, the client browser can create the new page with the retrieved delta page information (e.g., control deltas). For example, the new page might include the new state of each control on the page affected by the user input. In one embodiment, the client browser can update the page based on the retrieved delta page information by using a web browser scripting language program transmitted with the page. For example, the retrieved delta page information can be layered into the page via a JavaScript code and Dynamic HTML. Alternatively, a program embedded in the client application or program can accomplish such updating.

Figure 3b is a flow diagram illustrating a method for receiving page information on a client side in accordance with one embodiment of the present invention. The

method includes, responsive to receiving user input that is not associated with delta page information available at the client side, requesting 315 a new page. For example, a page generation unit on the server side could be contacted to produce a new page that is responsive to the user input received on the client side. The method further includes receiving 320 the new page and any associated delta page information. This delta page information might, for example, represent the difference (e.g., textual, graphical, physical, audible information) between the newly generated page and any one of a number of next pages commonly requested from that new page. As such, if one of those commonly requested pages is selected next, then steps 305 and 310 of Figure 3a can be carried out thereby reducing latency associated with server side processing time and transmission time.

Figure 4 is a pictorial representation of delta page information stored in a memory in accordance with one embodiment of the present invention. In this example, delta page information is indexed in a look-up table according to the corresponding user input. Assume that this table is embedded in a current page being presented to a user via an interface such as a client browser or UI. The four user inputs (A, B, C, and D) shown in the table might be the most commonly selected configuration states from the current page. Any of these four user inputs can represent a single user input (e.g., the first selected feature of a configurable product). On the other hand, any of these four user inputs can represent an accumulation of user inputs (e.g., a configuration state of a configurable product).

Each of the user inputs stored in the table is related to delta page information. This delta page information represents the difference between the current page and the

next page requested based on the related user input. As such, this delta page information can be used to create that next page without having to access a server side page generation unit. In the context of a product configuration environment, nor will a configuration engine (whether on the client side or the server side) have to be accessed.

5 In the example shown, user input A is related to two different portions of delta page information. Each portion may comprise, for example, textual and graphical information that is responsive to user input A. Such delta configuration page information may embody preprocessed configuration engine computations that are responsive to user input A. User input B is also related to two different portions of delta page information. The  
 10 first portion is graphical in nature (e.g., a control such as a pull down list), while the second portion is a textual conflict explanation that is responsive the user input B. The delta page information related to user input C is a textual conflict explanation that is responsive the user input C. User input D is related to configuration engine computations. Such computations define constraints and incompatibilities associated with  
 15 user input D (e.g., a selected configuration state). Storing these computations on the client side might be desirable, for example, in an application where the client side has access to a local page generation unit for generating a page that represents the stored configuration engine computations.

Other types of delta page information can be stored as well. For example, user  
 20 input E is related to audio signal information. User input F, on the other hand, is related to Braille information. For example, the delta page information associated with input E could be a digital data file that, when applied to an audio system (e.g., a sound card of an interactive personal computer system), produces a tone, pitch or melody having a

communicative meaning that is responsive to user input E. Likewise, the delta page information associated with input F could be a digital data file that, when applied to a Braille machine (e.g., a Braille writer), produces a Braille message responsive to user input F. Such non-visual delta page information can be used to replace the current page being presented to the user, or can be used to update the current page so that the resulting page is a hybrid of the current page and the delta page information, just as can be done with visual delta page information.

Once a user provides an input, that input can be compared to the user inputs stored in the table. Upon finding a match, the related delta page information can then be retrieved and used to update the current page. The process of comparing the user input to the user inputs listed in memory, and updating the initial page with the delta page information thereby creating the requested next page can be accomplished by a program or algorithm. Such a program can be, for example, embedded in the initial page transmitted from the server side (e.g., a web browser scripting language program using Dynamic HTML), or it can be embedded in a client-based program (e.g., a C++ program).

The foregoing description of the embodiments of the invention has been presented for the purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form disclosed. Many modifications and variations are possible in light of the above teaching. It is intended that the scope of the invention be limited not by this detailed description, but rather by the claims appended hereto.

## CLAIMS

What is claimed is:

1           1.       A method for updating a configuration page on a user side of an Internet-  
2       based configuration system without having to contact a server side of the configuration  
3       system, the method comprising:

4                 responsive to the user side receiving a user input that is associated with delta  
5                 configuration page information available at the user side, retrieving the  
6                 delta configuration page information; and

7                 updating the configuration page based on the delta configuration page  
8                 information.

1           2.       The method of claim 1, wherein the delta configuration page information  
2       is comprised of a control delta that represents changes in a control of the configuration  
3       page as a result of the user input.

1           3.       The method of claim 1, wherein the delta configuration page information  
2       embodies preprocessed configuration engine computations that are responsive to the user  
3       input.

1           4.       The method of claim 1, wherein the updating step further comprises:  
2                 layering the delta configuration page information that is associated with the  
3                 user input into the configuration page via Dynamic HTML.

1           5.       The method of claim 1, wherein the updating step is performed by a  
2       process that is embedded in the configuration page.

1           6.       The method of claim 1, wherein the delta page information is embedded in  
2       the configuration page.

1           7.       A method for transmitting product configuration information generated by  
2       a server side of an Internet-based configuration system to a user side of the configuration  
3       system, the method comprising:

4                 generating a configuration page that allows a user to provide a user input to the  
5                 configuration system;

6 associating delta configuration page information with the configuration page;  
7 and  
8 transmitting the configuration page and the delta configuration page  
9 information to the user side from the server side.

1 8. The method of claim 7, wherein the associating step is performed as part  
2 of the generating step.

1 9. The method of claim 7, wherein the delta configuration page information  
2 is contained in a look-up table and the associating step further comprises:

3 organizing the delta configuration page information within the look-up table  
4 pursuant to an indexing scheme; and  
5 embedding the look-up table in the configuration page.

1 10. The method of claim 7, wherein the delta configuration page information  
2 is indexed according to specific user inputs that can be provided from the configuration  
3 page, each specific user input being related to a portion of the delta configuration page  
4 information.

1 11. The method of claim 7, wherein the delta configuration page information  
2 is comprised of a control delta that represents changes in a control of the configuration  
3 page as a result of the user input.

1 12. The method of claim 7, wherein the delta configuration page information  
2 embodies preprocessed configuration engine computations that are responsive to the user  
3 input.

1 13. The method of claim 7 further comprising:

2 transmitting a process for updating the configuration page with the delta  
3 configuration page information to the user side from the server side.

1 14. A method for receiving over the Internet product configuration  
2 information generated by an Internet-based configuration system, the method comprising:

responsive to receiving a user input that is not associated with locally available delta configuration page information, requesting a new configuration page; and

receiving the new configuration page and delta configuration page information that is associated with the new configuration page.

15. The method of claim 14, wherein in response to receiving a particular user input, the delta configuration page information is combined with the configuration page thereby defining a new configuration page that is responsive to the particular user input.

16. A method for transmitting page information generated on a server side of a network to a client side of that network, the method comprising:

responsive to receiving a request for page information that is not available at the client side, generating a page that reflects the requested information and is associated with delta page information; and

transmitting the page and the delta page information to the client side.

17. A method for updating a page on a client side of a network without having to contact a server side of that network, the method comprising:

responsive to the client side receiving a user input that is associated with delta page information available at the client side, retrieving the delta page information; and

updating the page based on the delta page information.

18. A method for receiving page information on a client side of a network from a server side of that network, the method comprising.

responsive to receiving a user input that is not associated with delta page information available at the client side, requesting a new page; and

receiving the new page and delta page information that is associated with the new page.

19. A computer-readable medium having instructions stored thereon which, when executed by a processor included on a user side of an Internet-based configuration system, cause the processor to perform the steps of:

4 responsive to the user side receiving a user input that is associated with delta  
5 configuration page information available at the user side, retrieving the  
6 delta configuration page information; and  
7 updating a configuration page based on the delta configuration page  
8 information without having to contact a server side of the configuration  
9 system.

1 20. A computer-readable medium having instructions stored thereon which,  
2 when executed by a processor included on a server side of an Internet-based  
3 configuration system, cause the processor to perform the steps of:

4 generating a configuration page that allows a user to provide input to the  
5 configuration system;  
6 associating delta configuration page information with the configuration page;  
7 and  
8 transmitting the configuration page and the delta configuration page  
9 information.

1 21. A computer-readable medium having instructions stored thereon which,  
2 when executed by a processor included on a user side of an Internet-based configuration  
3 system, cause the processor to perform the steps of:


4 responsive to receiving a user input that is not associated with delta  
5 configuration page information available at the user side, requesting a  
6 new configuration page; and  
7 receiving the new configuration page and delta configuration page information  
8 that is associated with the new configuration page.

# DELTA CACHING


## ABSTRACT OF THE DISCLOSURE

A solution to latencies associated with server side processing time, as well as to latency resulting from the transit of information or tools from a server side to a client or user side is provided. The server side and client side can be coupled via a hard link or a network-type connection such as the Internet or a local area network. Select delta page information is stored in a concise manner on client side. As a result, the client does not have to contact the server when a user requests page information that is associated with stored delta page information. The stored delta page information can be accessed and used to update the current page thereby yielding the requested page. Thus, latency from server side processing and network transit time is reduced. An algorithm can be implemented on the client side to identify relevant stored delta page information, and to update the current page with that delta page information.


Fig. 1

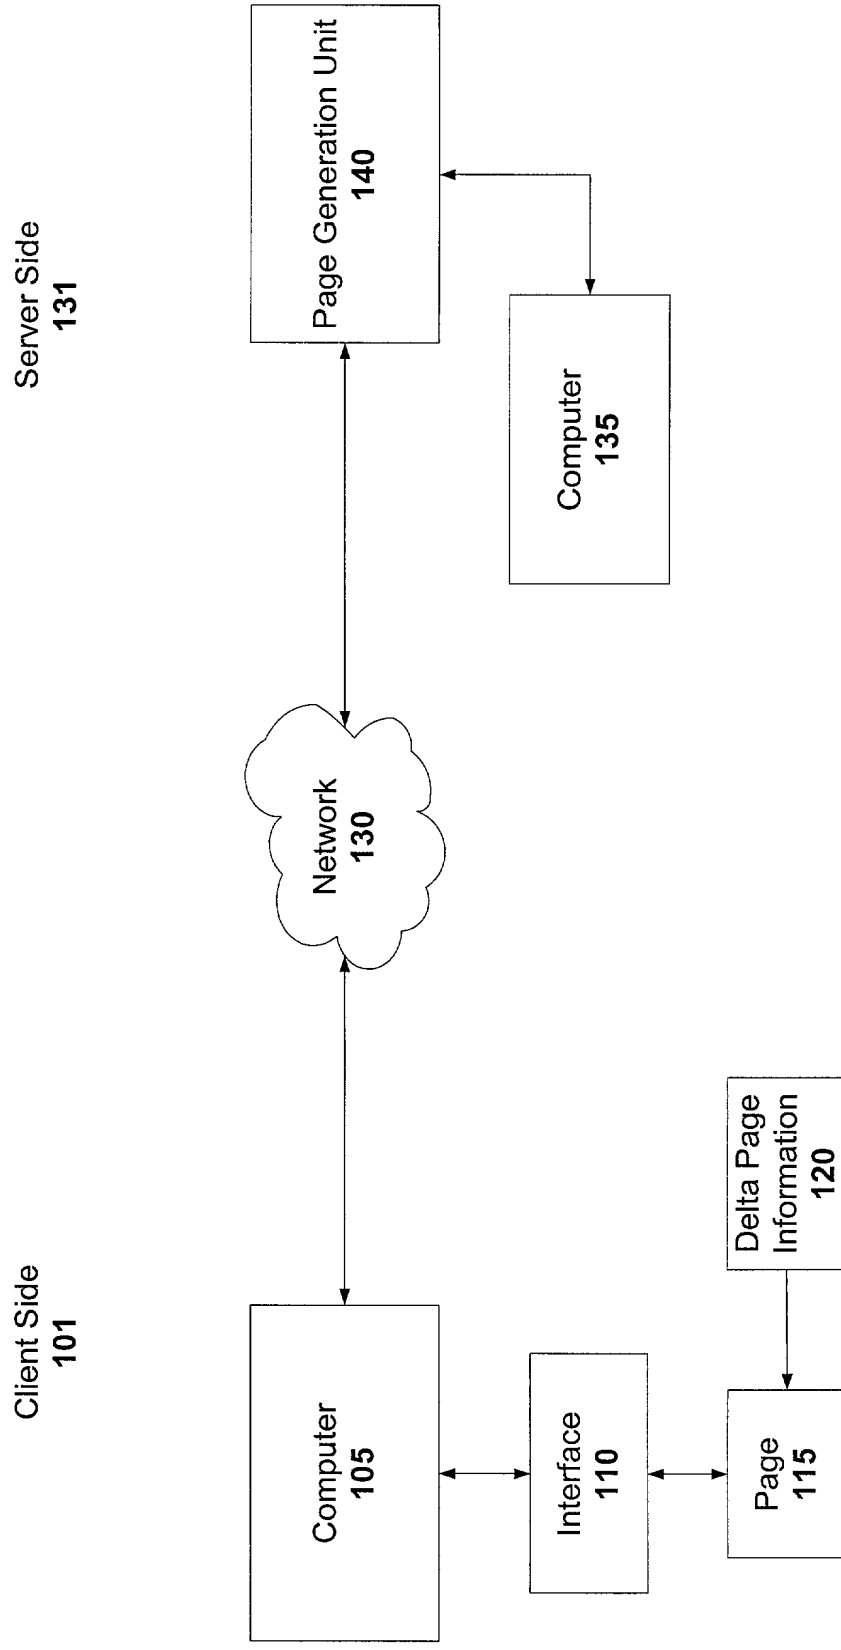


**Fig. 2**

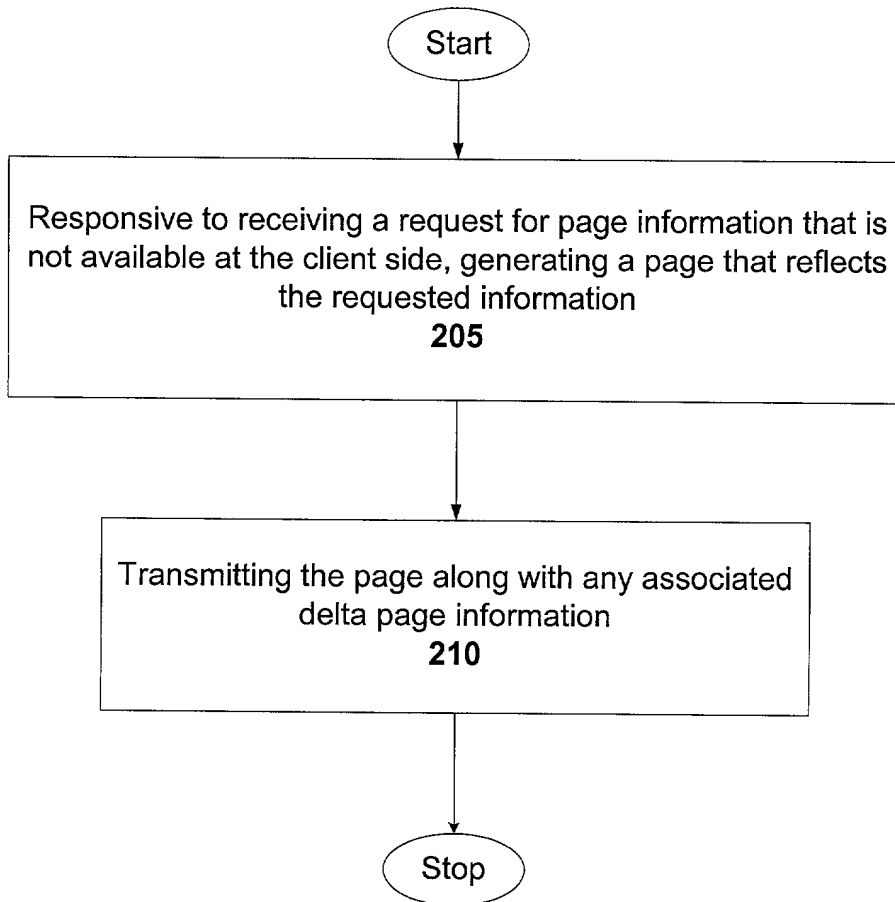



**Fig. 3a**

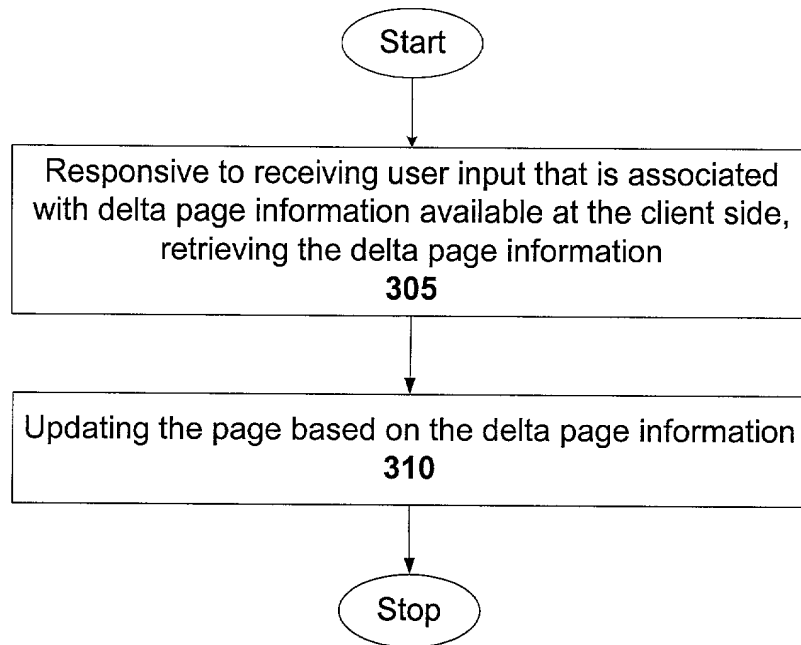

**Fig. 3b**

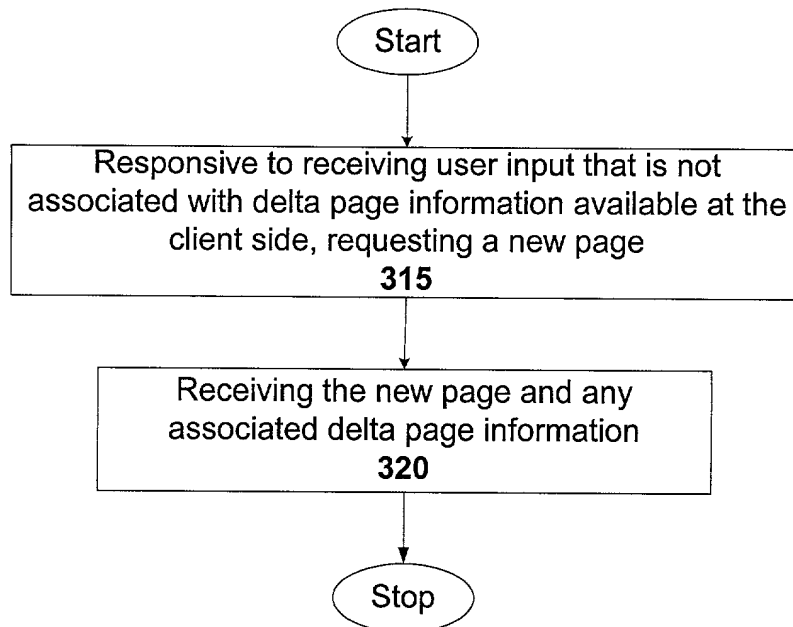

**Fig. 4**

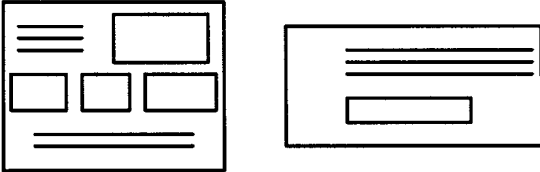User Input	Delta Page Information
A	
B	 Conflict Explanation
C	Conflict Explanation
D	Configuration Engine Results
E	Audio Signal
F	Braille Information



<b>0010/PTO</b> Rev. 6/95  <b>U.S. Department of Commerce</b> Patent and Trademark Office  <b>DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION</b>  <input checked="" type="checkbox"/> Declaration Submitted with Initial Filing      OR <input type="checkbox"/> Declaration Submitted after Initial Filing	Attorney Docket Number	<b>21113-04968</b>
	First Named Inventor	<b>Marc S. Casalaina</b>
	<i>COMPLETE IF KNOWN</i>	
	Application Number	<b>NEW</b>
	Filing Date	<b>HEREWITH</b>
	Group Art Unit	<b>Unassigned</b>
	Examiner Name	<b>Unassigned</b>

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**DELTA CACHING**

the specification of which

(Title of the Invention)

☒ is attached hereto

OR

☐ was filed on (MM/DD/YYYY) [ ] as United States Application Number or PCT International Application Number [ ] and was amended on (MM/DD/YYYY) [ ] (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations. § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code § 119 (a)-(d) or § 385(b) of any foreign application(s) for patent or inventor's certificate, or § 365 (a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority sheet attached hereto:

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental sheet attached hereto.



+

DECLARATION			Page 2
I hereby claim the benefit under Title 35, United States Code § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.			
U.S. Parent Application Number	PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
<input type="checkbox"/> Additional U.S. or PCT international application numbers are listed on a supplemental priority sheet attached hereto.			

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:			
Name	Registration Number	Name	Registration Number
David L. Hayes Brian M. Hoffman	34,838 39,713	John R. Carr Neil F. Maloney	42,390 42,833
<input type="checkbox"/> Additional attorney(s) and/or agent(s) named on a supplemental sheet attached hereto.			
Please direct all correspondence to:  <b>NEIL F. MALONEY</b> <b>Fenwick &amp; West LLP</b> <b>Two Palo Alto Square</b> <b>Palo Alto, CA 94306</b> <b>U.S.A.</b>			
Telephone	(415) 875-7787	Fax	(415) 281-1350

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.							
<b>Name of Sole or First Inventor:</b>		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name	Marc	Middle Initial	C.	Family Name	Casalaina	Suffix e.g. Jr.	
Inventor's Signature					Date		
Residence: City	San Jose	State	CA	Country	USA	Citizenship	US
Mailing Address	3579 Sandpebble Drive, #415						
Mailing Address							
City	San Jose	State	CA	Zip	95136	Country	USA
<input type="checkbox"/> Additional inventors are being named on supplemental sheet(s) attached hereto							